

ACCESSORIES



power cap

1 FARAD
CAPACITOR
LED 3-DIGIT
DISPLAY



power cable

35MM²
OFC
PLATINUM
POWER
CABLE

MERCHANDISE




ODC cap



ODC polo shirt

WHAT THE F*** IS ODC?

ODC ORIGINATES FROM THE DUTCH WEST COAST, WHERE TWO GUYS WHO HAPPEN TO BE REAL CAR SYSTEM PROFESSIONALS WITH EXTREMELY CREATIVE MINDS JOINED FORCES: THE FIRST ONE IS SPECIALIZED IN CAR AUDIO ELECTRONICS, THE OTHER ONE IS AN EXPERT IN CUSTOMIZING CARS. THEY DECIDED TO CREATE THEIR OWN HIGH-QUALITY BRAND, ODC, BECAUSE THEY NEEDED PRODUCTS WHICH WOULD MEET THEIR UTMOST HIGH STANDARDS. THEY STARTED CO-OPERATING WITH SIGNAT, AS THIS BRAND ALREADY HAD THE HIGH-END RENOWN, THE EXPERTISE AND THE DISTRIBUTION CHANNELS TO GET THE ODC PRODUCTS SPREAD AROUND THE WORLD.

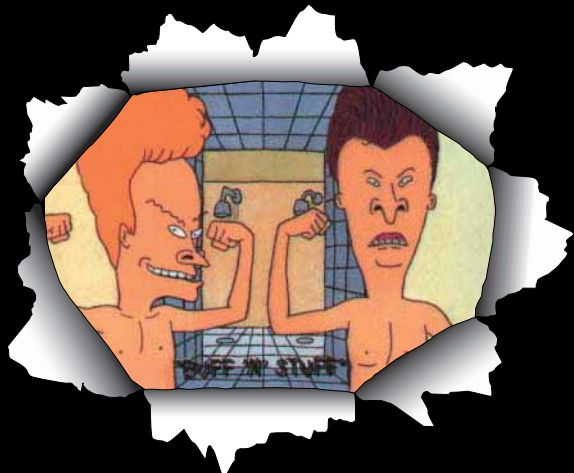

SIGNAT



Pictures may deviate. All products supplied as available. Subject to modifications without notice.

www.signat.de

info@signat.de

SIGNAT



AMPLIFIER



ODC5000



IF THIS KILLER AMP CAN'T DO THE JOB, YOU BETTER FORGET ABOUT IT! FIRE UP YOUR SUBWOOFERS WITH THIS MEAN MACHINE AND YOU'LL BLOW YOUR COMPETITORS CLEAN AWAY! THIS BUILT-TO-BLAST POWER FACTORY PUTS ALL OF ITS POTENTIAL IN ONE SINGLE HELLUVA CHANNEL.

ODC5000 SPECS

System	Class-D mono amplifier
Max power	5000 W
4 Ohm rating	1x1000 W
2 Ohm rating	1x1600 W
1 Ohm rating	1x2500 W
Frequency response	20 Hz~250 Hz
THD+noise	<1%
Damping factor	>50
Signal to noise ratio	-59 dBA
Crossover /slope	30~250 Hz,
12/24dB/oct	0,2~5 V
Input sensitivity	1 Ohm
Safe load impedance	intelliQ
Equalization circuit	ENS
Noise suppression	BTC
Balanced inputs	Included
Remote level control	58x260x61 mm
Dimensions	

SUBWOOFER



ODC12



YOU'LL GET A HARD TIME FINDING A MORE SUPREME SUB THAN THIS BABY. IT PLAYS SO LOUD AND SO LOW, YOU BARELY WANT TO EXPOSE YOUR POOR CAR TO IT. BEWARE! ONLY GIVE WAY TO YOUR ULTRA LOW SOUNDS AFTER HAVING PUT IN YOUR EARPLUGS FIRST!

ODC 12 SPECS

System	12" (306mm) subwoofer
RMS power handling	1000 W
3-piece magnet	300 Oz
4-layer aluminum voice coil	76,2mm
Cone	kevlar
Surround	rubber
Basket	aluminum
Chromed pole plate	25mm
Re	4 Ohms
Qes	0,31
Qms	4,46
Qts	0,36
BL	25,6 Tesla
Fs	38,3 Hz
Mms	210,2 g
Vas	32,4 litres
SPL	89,6 dB

